


14MP1




14MP2

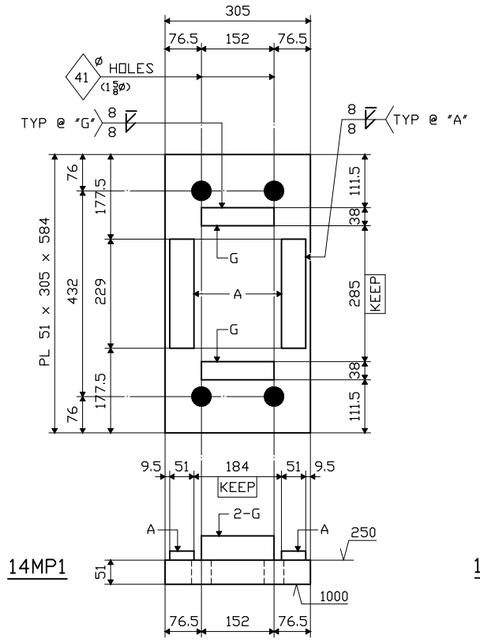


14MP3

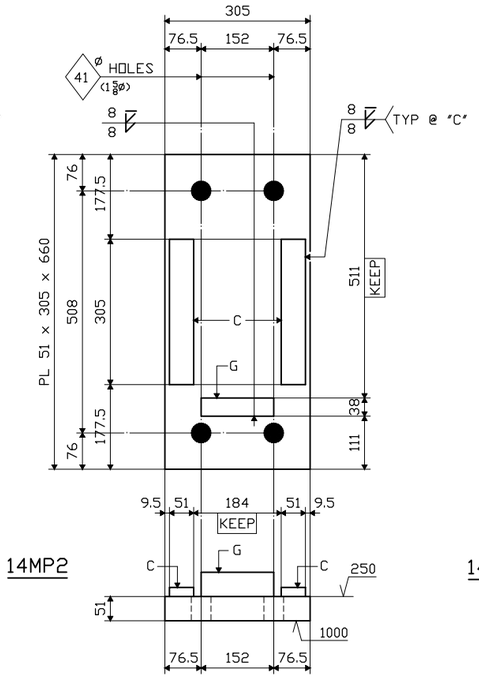


14MP4
14MP5

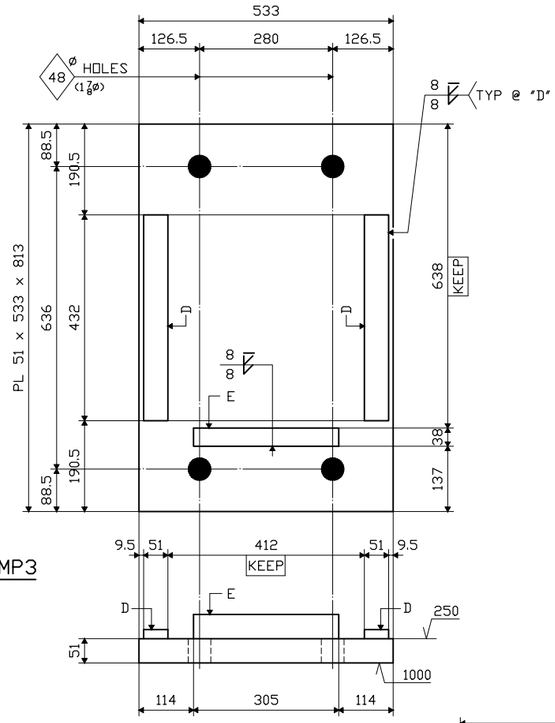


14MP6
14MP7

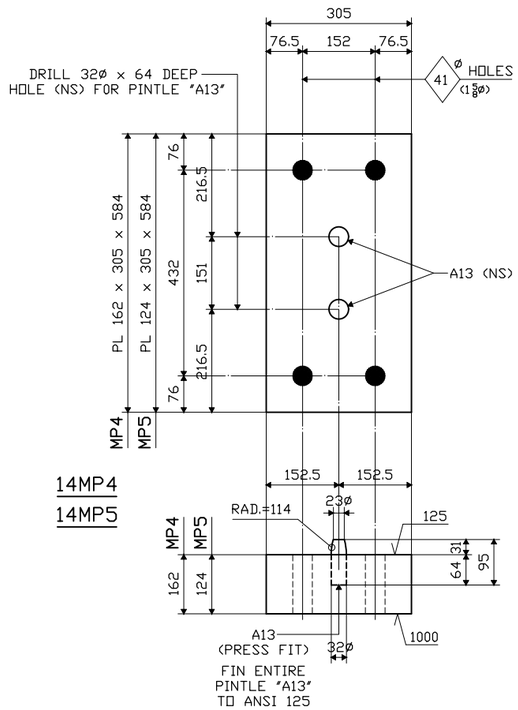


14MP8

# SHOP BILL
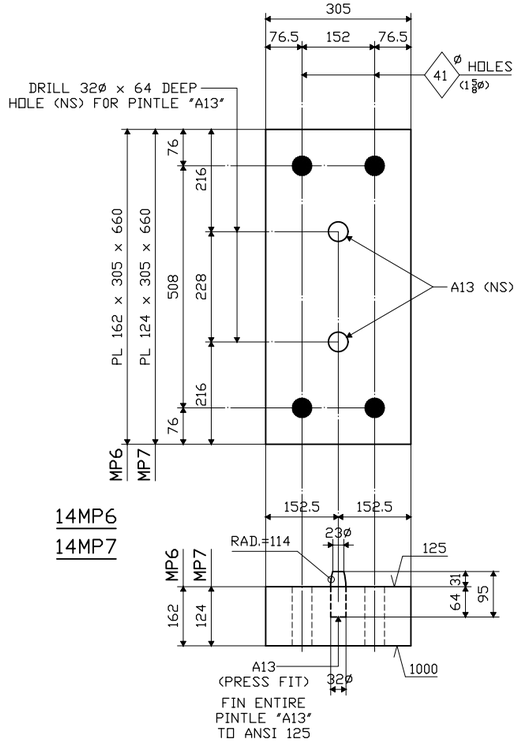
| LINE ITEM | SHIPPING LIST NO. PCS | SHIPPING LIST MARK | PCS REQ'D | DESCRIPTION CODE | DESCRIPTION SYMBOL | DESCRIPTION SECTION DIM'S | LENGTH mm | ASSEMBLY MARK | REMARKS | MTRL. SPEC. | MATERIAL APPLICATION P.O. NO. | MATERIAL APPLICATION LINE ITEM | MATERIAL APPLICATION NO. PCS. | MATERIAL APPLICATION LENGTH |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | | | | | | | | | | | | | | |
| 2 | 12 | 14MP1 | 12 | | PL | 57 x 305 | 584 | | FIN TO 51 | A709M-345W | SHN 1 | | | |
| 3 | | | 24 | | PL | 19 x 51 | 229 | A | | A709M-345W | 9987BL | 1 | | |
| 4 | | | 24 | | PL | 38 x 51 | 152 | G | | A709M-345W | SHN 1 | | | |
| 5 | | | | | | | | | | | | | | |
| 6 | 4 | 14MP2 | 4 | | PL | 57 x 305 | 660 | | FIN TO 51 | A709M-345W | SHN 1 | | | |
| 7 | | | 8 | | PL | 19 x 51 | 305 | C | | A709M-345W | 9987BL | 1 | | |
| 8 | | | 4 | | PL | 38 x 51 | 152 | G | | A709M-345W | SHN 1 | | | |
| 9 | | | | | | | | | | | | | | |
| 10 | 2 | 14MP3 | 2 | | PL | 57 x 533 | 813 | | FIN TO 51 | A709M-345W | SHN 1 | | | |
| 11 | | | 4 | | PL | 19 x 51 | 432 | D | | A709M-345W | 9987BL | 1 | | |
| 12 | | | 2 | | PL | 38 x 51 | 305 | E | | A709M-345W | SHN 1 | | | |
| 13 | | | | | | | | | | | | | | |
| 14 | 6 | 14MP4 | 6 | | PL | 171 x 305 | 584 | | FIN TO 162 | A588M | 9988BL | 1 | | |
| 15 | | | 12 | | BAR | 32 RD | 95 | A13 | FIN | A709M-345W | 9995LE | 5 | | |
| 16 | | | | | | | | | | | | | | |
| 17 | 6 | 14MP5 | 6 | | PL | 130 x 305 | 584 | | FIN TO 124 | A588M | 9988BL | 2 | | |
| 18 | | | 12 | | BAR | 32 RD | 95 | A13 | FIN | A709M-345W | 9995LE | 5 | | |
| 19 | | | | | | | | | | | | | | |
| 20 | 2 | 14MP6 | 2 | | PL | 171 x 305 | 660 | | FIN TO 162 | A588M | 9988BL | 1 | | |
| 21 | | | 4 | | BAR | 32 RD | 95 | A13 | FIN | A709M-345W | 9995LE | 5 | | |
| 22 | | | | | | | | | | | | | | |
| 23 | 2 | 14MP7 | 2 | | PL | 130 x 305 | 660 | | FIN TO 124 | A588M | 9988BL | 2 | | |
| 24 | | | 4 | | BAR | 32 RD | 95 | A13 | FIN | A709M-345W | 9995LE | 5 | | |
| 25 | | | | | | | | | | | | | | |
| 26 | 2 | 14MP8 | 2 | | PL | 146 x 457 | 813 | | FIN TO 140 | A588M | 9988BL | 2 | | |
| 27 | | | 6 | | BAR | 38 RD | 95 | C13 | FIN | A709M-345W | 9995LE | 4 | | |
| 28 | | | | | | | | | | | | | | |
| 29 | | | | | | | | | | | | | | |
| 30 | | | | | | | | | | | | | | |
| 31 | | | | | | | | | | | | | | |
| 32 | | | | | | | | | | | | | | |
| 33 | | DOMESTIC MATERIAL | | | | | | | | | | | | |

SEE HN1 FOR FABRICATION NOTES

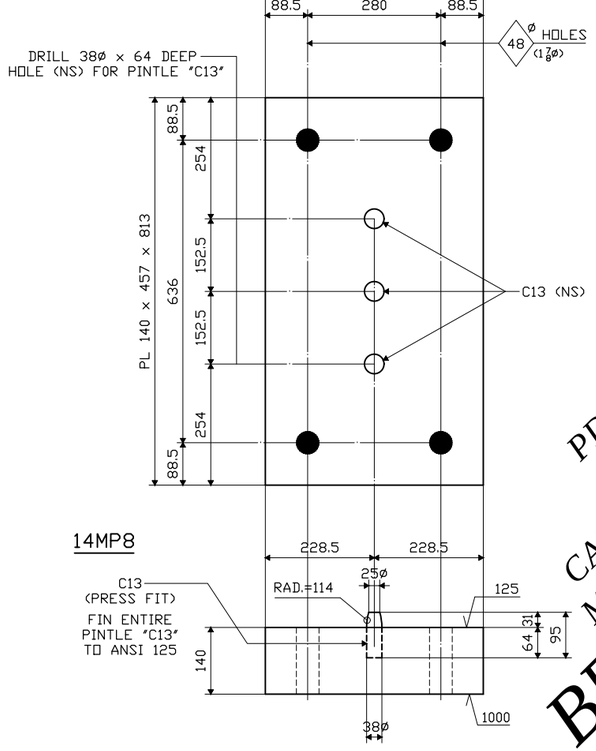PDC Sample DWG 402
RAPIDES PARISH, LA
CAROLINA STEEL CORPORATION
MERRICK CONSTRUCTION CO. INC.
LADOT 2002
BEARING ITEM Detail

F.A.P. # STP-7800(015)
LADOT PROJ # 015-01-0035
RAPIDES PARISH

1 COLFAX

FABRICATED BY MILES AS NOTED
SHOP FASTENERS PER HN1
SHOP PAINT
SHOP INSPECTION
GENERAL NOTES

| REVISIONS DATE | NO. | BY | CHANGES: MAT. APPLICATION & FAB PLANT |
|---|---|---|---|
| 10/02 | R1 | PDC/SB | |

ORDER NO. 02-18077H22
DETAILS OF BRG. MATERIAL
PROJECT KCS R.R. UNDERPASS IMPROVEMENTS
KCS RAILROAD OVER US 165
LOCATION RAPIDES PARISH, LA
CUSTOMER MERRICK CONSTRUCTION CO., INC.

**CAROLINA STEEL CORPORATION**

MADE BY JB
CHECKED BY PDC/SB
SQUAD LEADER FMW
DATE 02-02

SHEET HF14